



Filtrá

Filtrá vibración S.L.

C/Bronce, 1-3
P.I. Les Guixeres 08915 – Badalona
BARCELONA (SPAIN)

Phone: + 00 34 902 190 069
Fax: + 00 34 902 190 170
www.filtrá.com – filtrá@filtrá.com

DIGITAL ELECTROMAGNETIC SIEVE SHAKERS



The digital electromagnetic sieve shakers are used for particle test separation. Measuring range begins with 0.040 mm.

They have a polyurethane resin framework with an electronic power control provided of intermittence and operation time systems.


Specially designed for test sieves of Ø100-Ø150 mm and Ø200-Ø203 mm allows:

- ▶ 8 test sieves Ø100, Ø150, Ø200, Ø203 mm x 50 mm useful height.
- ▶ 16 test sieves Ø100, Ø150, Ø200, Ø203 mm x 25 mm useful height.

The clamping system consists of two stainless steel threaded rods, two bakelite knobs and a methacrylate lid.

Available models: **FTL-0150** y **FTL-0200**

| TECHNICAL CHARACTERISTICS | | | | |
|---------------------------|-----------|----------|--------|-------|
| FTL-0150 | 220-240 V | 50-60 Hz | 0.4 kW | 40 Kg |
| FTL-0200 | 220-240 V | 50-60 Hz | 0.4 kW | 40 Kg |

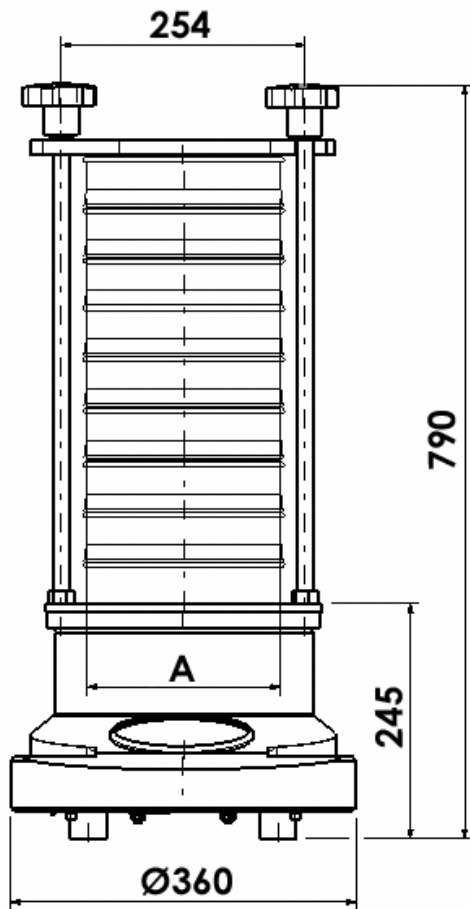

| (mm) | FTL-0150 | FTL-0200 |
|------|-------------|-------------|
| A | Ø100 / Ø150 | Ø200 / Ø203 |




INCLUDE:

- ▶ Digital electromagnetic sieve shaker
- ▶ Line power cord.
- ▶ Clamping system (st. steel threaded rods and bakelite knobs).
- ▶ Methacrylate lid.
- ▶ Operating instructions manual and packing.
- ▶ CE declaration of conformity.

OPTIONAL RELATED PRODUCTS

- ▶ Fast clamping system



This clamping system consists of two stainless steel smooth rods and two mechanized parts (with carbon steel and bluing). Ensure that sieves are held firmly and enable them to be quickly released from a column of 8 sieves to a column of 1 sieve in few seconds.